

**AD 2. AERODROMES****SUSO AD 2.14-1 AERODROME LOCATION INDICATOR AND NAME**

SUSO - SALTO / Intl Nueva Hespérides

**SUSO 2.14-2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA**

1	<i>ARP coordinates and site at AD</i>	312605S 0575903W Location: 440 M SW from THR 23
2	<i>Direction and distance from (city)</i>	7 KM SW from the city
3	<i>Elevation/Reference temperature</i>	43 M (141 FT) / 32°C
4	<i>Geoid undulation at AD ELEV PSN</i>	16 M
5	<i>MAG VAR/Annual change</i>	11° W (JAN 2020) / 0.17° increasing
6	<i>AD operator, address, telephone, telefax, e-mail address, AFS address, website address</i>	Puerta del Sur S.A. Aeropuerto Internacional de Salto "Nueva Hespérides" - Salto Tel: 4732 7119 - Mobile (+598) 92344298 (Puerta del Sur) Telefax: 4732 7119 ✈️ Flight Plan: 2064 0329 ext 2356 ✈️ AD Operator: 2604 0329 ext 2350 e-mail: suso@dinacia.gub.uy AFS: SUSOYTYX
7	<i>Types of traffic permitted (IFR/VFR)</i>	IFR/VFR
8	<i>Remarks</i>	Nil

**SUSO AD 2.14-3 HORAS DE FUNCIONAMIENTO**

1	<i>AD Operator</i>	H24
2	<i>Customs and immigration</i>	O/R
3	<i>Health and sanitation</i>	In the city (air ambulance in the Centro de Aviación Salto and two private planes to make putting ambulance stretchers and equipment)
4	<i>AIS Briefing Office</i>	Nil
5	<i>ATS Reporting Office (ARO)</i>	MON – SUN from 10:00 to 22:00 UTC
6	<i>MET Briefing Office</i>	MON – SUN from 10:00 to 22:00 UTC (Tel.: 4733 4888; 4732 2310)
7	<i>ATS</i>	MON – SUN from 10:00 to 22:00 UTC
8	<i>Fuelling</i>	As AD Operator
9	<i>Handling</i>	As AD Operator
10	<i>Security</i>	As AD Operator

11	<i>De-icing</i>	Nil
12	<i>Remarks</i>	Nil

#### SUSO AD 2.14-4 HANDLING SERVICES AND FACILITIES

1	<i>Cargo-handling facilities</i>	Nil
2	<i>Fuel/oil types</i>	☛AVGAS 100, JET A1 / Oil: Philips 66-100 ad
3	<i>Fuelling facilities/capacity</i>	AVGAS 100: 1 Tank of 25.000 L JET A1: 1 Tank of 30.000 L
4	<i>De-icing facilities</i>	Nil
5	<i>Hangar space for visiting aircraft</i>	Nil
6	<i>Repair facilities for visiting aircraft</i>	Nil
7	<i>Remarks</i>	GPU equipment 115 V; GPU equipment 28 V ☛Ultra starter Kit Model UST4030 equipment

#### SUSO AD 2.14-5 PASSENGER FACILITIES

1	<i>Hotels</i>	In the city
2	<i>Restaurants</i>	In the city
3	<i>Transportation</i>	Taxis and limos in the city
4	<i>Medical facilities</i>	In the city (air ambulance in the Centro de Aviación Salto)
5	<i>Bank and Post Office</i>	Nil
6	<i>Tourist Office</i>	Nil
7	<i>Remarks</i>	Nil

#### SUSO AD 2.14-6 RESCUE AND FIRE FIGHTING SERVICES

1	<i>AD category for fire fighting</i>	CAT 5. A Rosebauer Panter model vehicle, 4 x 4, 6000 L of water, 750 L of level C foam and 250 kg of purple K PK92 chemical powder
2	<i>Rescue equipment</i>	Approach tools and equipment
3	<i>Capability for removal of disabled aircraft</i>	To be coordinated with the procedures of the aerodrome operator Puerta del Sur S.A.
4	<i>Remarks</i>	In case of major accident, FAU aircraft support immediate response, FAU rescue personnel, firefighters and doctors specializing in severe polytrauma.

**SUSO AD 2.14-7 SEASONAL AVAILABILITY - CLEARING**

1	<i>Types of clearing equipment</i>	Nil
---	------------------------------------	-----

**SUSO AD 2.14-8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA**

1	<i>Apron surface and strength</i>	Surface: asphaltic concrete ☛Strength: 19/R/B/X/U
2	<i>Taxiway width, surface and strength</i>	Width: 19 M Surface: asphaltic concrete ☛Strength: 19/R/B/X/U
3	<i>Altimeter checkpoint location and elevation</i>	Terminal building apron (312614S/0575851W) 37 M
4	<i>VOR checkpoints</i>	Nil
5	<i>VOR/INS checkpoints</i>	Nil
6	<i>Remarks</i>	Nil

**SUSO AD 2.14-9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS**

1	<i>Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands</i>	☛Parking stand Id signs ☛Taxiway centreline signs
2	<i>RWY and TWY markings and LGT</i>	RWY: Designation, centre line, THR and aiming point TWY: centre line
3	<i>Stop bars</i>	On TWY with RWY
4	<i>Remarks</i>	Nil

**SUSO AD 2.14-10 AERODROME OBSTACLES**

<i>In Area 2</i>					
<i>OBST ID/ Designation</i>	<i>OBST type</i>	<i>OBST position</i>	<i>ELEV/HGT</i>	<i>Markings/ Type, colour</i>	<i>Remarks</i>
a	b	c	d	e	f
No data					

<i>In Area 3</i>					
<i>OBST ID/ Designation</i>	<i>OBST type</i>	<i>OBST position</i>	<i>ELEV/HGT</i>	<i>Markings/ Type, colour</i>	<i>Remarks</i>
a	b	c	d	e	f
No data					

**SUSO AD 2.14-11 METEOROLOGICAL INFORMATION PROVIDED**

1	<i>Associated MET Office</i>	SALTO
2	<i>Hours of service MET Office outside hours</i>	☛ 10:00 a 22:00 UTC
3	<i>Office responsible for TAF preparation Periods of validity</i>	Surveillance MET Office CARRASCO (O/R)
4	<i>Trend forecast Interval of issuance</i>	Nil
5	<i>Briefing/consultation provided</i>	O/R
6	<i>Flight documentation Language(s) used</i>	Nil
7	<i>Charts and other information available for briefing or consultation</i>	Nil
8	<i>Supplementary equipment available for providing information</i>	Nil
9	<i>ATS units provided with information</i>	SALTO TWR
10	<i>Additional information (limitation of service, etc.)</i>	TWR anemometer and barometer U/S

**SUSO AD 2.14-12 RUNWAY PHYSICAL CHARACTERISTICS**

Designations RWY NR	TRUE BRG	Dimensions of RWY (M)	Strength (PCN) and surface of RWY and SWY	THR coordinates. RWY end coordinates. THR geoid undulation		THR elevation and highest elevation of TDZ of precision APP RWY
				5	6	
05	038.88°	1 588 x 45	19/R/C/X/U Asphaltic concrete	312638.58S 0575925.92W 312638.58S 0575925.92W GUND 16.6 M	THR 43 M/ 141 FT	
23	218.88°	1 588 x 45	19/R/C/X/U Asphaltic concrete	312558.47S 0575848.20W 312558.47S 0575848.20W GUND 16.5 M	THR 39 M/ 128 FT	
13	116.23°	700 x 50	Grass	312551.50S 0575919.24W 312551.50S 0575919.24W GUND 16.5 M	THR 35 M/ 115 FT	
31	296.22°	700 x 50	Grass	312601.54S 0575855.45W 312601.54S 0575855.45W GUND 16.5 M	THR 40 M/ 131 FT	
Slope of RWY-SWY	SWY dimensions (M)	CWY dimensions (M)	Strip dimensions (M)	OFZ	RESA (M)	Remarks
7	8	9	10	11	12	13
0.5%/-0.9%/1%/-0.1% (244 M) (438 M) (761 M) (145 M)	Nil	Nil	1 708 x 280	Nil	90 x 90	Nil
0.1%/-1%/0.9%/-0.5% (145 M) (761 M) (438 M) (244 M)	Nil	Nil	1 708 x 280	Nil	90 x 90	Nil

**SUSO AD 2.14-13 DECLARED DISTANCES**

<i>RWY Designator</i>	<i>TORA (M)</i>	<i>TODA (M)</i>	<i>ASDA (M)</i>	<i>LDA (M)</i>	<i>Remarks</i>
1	2	3	4	5	6
05	1 588	1 588	1 588	1 588	Nil
23	1 588	1 588	1 588	1 588	Nil
13	☛700	☛700	☛700	☛700	Nil
31	☛700	☛700	☛700	☛700	Nil

**SUSO AD 2.14-14 APPROACH AND RUNWAY LIGHTING**

<i>RWY Designator</i>	<i>APCH LGT type LEN INTST</i>	<i>THR LGT colour WBAR</i>	<i>VASIS (MEHT) PAPI</i>	<i>TDZ, LGT LEN</i>	<i>RWY Centre Line LGT Length, spacing, colour, INTST</i>	<i>RWY edge LGT LEN, spacing colour INTST</i>	<i>RWY End LGT colour WBAR</i>	<i>SWY LGT LEN (M) colour</i>	<i>Remarks</i>
1	2	3	4	5	6	7	8	9	10
05	SALS 420 M LIM	Green	PAPI	Nil	Nil	1588 M, 60 M White Amber	Red	Nil	Nil
23	SALS 210 M LIM	Green	PAPI	Nil	Nil	1588 M, 60 M White Amber	Red	Nil	Nil
13	Nil	Nil	Nil	Nil	Nil	Nil	Nil	Nil	Nil
31	Nil	Nil	Nil	Nil	Nil	Nil	Nil	Nil	Nil

**SUSO AD 2.14-15 OTHER LIGHTING, SECONDARY POWER SUPPLY**

1	<i>ABN/IBN location, characteristics and hours of operation</i>	☛ABN: In TWR / IBN: Nil
2	<i>LDI location and LGT Anemometer location and LGT</i>	☛WDI: 330 M SW from THR 23, lighted Anemometer: 50 M W from TWR
3	<i>TWY edge and centre line lighting</i>	Edge: blue lights Centre: Nil
4	<i>Secondary power supply/switch-over time</i>	Secondary power supply: 110 KW (automatic manual) for the entire aerodrome.
5	<i>Remarks</i>	Nil

**SUSO AD 2.14-16 HELICOPTER LANDING AREA**

1	<i>Coordinates TLOF or THR of FATO Geoid undulation</i>	Nil
2	<i>TLOF and/or FATO elevation M/FT</i>	Nil
3	<i>TLOF and FATO area dimensions, surface, strength, marking</i>	Nil
4	<i>True BRG FATO</i>	Nil
5	<i>Declared distance available</i>	Nil
6	<i>APP and FATO lighting</i>	Nil
7	<i>Remarks</i>	Nil

**SUSO AD 2.14-17 ATS AIRSPACE**

1	<i>Designation and lateral limits</i>	SALTO CTR Arc, radius 10 NM (18 KM) centred at 312605S 0575903W up to the FIR limit  SALTO ATZ Circle, radius 4 NM (7.4 KM) centred at 312605S 0575903W up to the FIR limit
2	<i>Vertical limits</i>	CTR: GND up to FL 055      ATZ: GND up to 450 M
3	<i>Airspace classification</i>	From MON to SUN from 10:00 to 22:00 UTC: "C"; others: "G"
4	<i>ATS unit call sign Language(s)</i>	Salto Tower Spanish, English (O/R)
5	<i>Transition altitude</i>	900 M
6	<i>Remarks</i>	Nil

**SUSO AD 2.14-18 ATS COMMUNICATION FACILITIES**

<i>Service designation</i>	<i>Call sign</i>	<i>Frequency</i>	<i>Hours of operation</i>	<i>Remarks</i>
1	2	3	4	5
TWR	Salto Tower	118.8 MHZ 122.1 MHZ*	As AD	* Secondary FREQ

**SUSO AD 2.14-19 RADIO NAVIGATION AND LANDING AIDS**

<i>Type of aid, MAG VAR, Type of supported OP (for VOR/ILS/MLS, give declination)</i>	<i>ID</i>	<i>Frequency</i>	<i>Hours of operation</i>	<i>Position of transmitting antenna coordinates</i>	<i>Elevation of DME transmitting antenna</i>	<i>Remarks</i>
1	2	3	4	5	6	7
Nil						



**SUSO AD 2.14-20 LOCAL TRAFFIC REGULATIONS**

☛ Nil

## SUSO AD 2.14-21 NOISE ABATEMENT PROCEDURES

☛ Nil

## SUSO AD 2.14-22 FLIGHT PROCEDURES

☛ Nil

**SUSO AD 2.14-23 ADDITIONAL INFORMATION**

☛ Nil

---

**SUSO AD 2.14-24 CHARTS RELATED TO AN AERODROME**

Aerodrome/Heliport Chart – ICAO.....	➡ AD 2.14-15
➡ Aerodrome Obstacle Chart – ICAO Type A – RWY 05/23 .....	AD 2.14-17
Instrument Approach Chart - ICAO RNAV (GNSS) RWY 05 .....	➡ AD 2.14-19

**INTENTIONALLY  
LEFT BLANK**

AERODROME/HELIPORT  
CHART - ICAO

31°26'05"S  
057°59'03"W  
ELEV 043  
(141)


TWR 118.8 - 122.1  
APRON 118.8 - 122.1

SALTO/Intl  
Nueva Hespérides

RWY	DIRECTION	THR	GUND	BEARING STRENGTH
05	050°	31°26'38.58"S 57°59'25.92"W	16.6 M	Runway: PCN 19/R/C/X/U  Taxiways and Apron: PCN 19/R/B/X/U
23	230°	31°25'58.47"S 57°58'48.20"W	16.6 M	
13	128°	31°25'51.50"S 57°59'19.24"W	16.5 M	No data
31	308°	31°26'01.54"S 57°58'55.45"W	16.5 M	



VAR 1° W - 2020  
ANNUAL RATE  
OF CHANGE 10 W

ELEVATIONS IN METRES (AND FEET)  
DIMENSIONS IN METRES  
BEARINGS ARE MAGNETIC

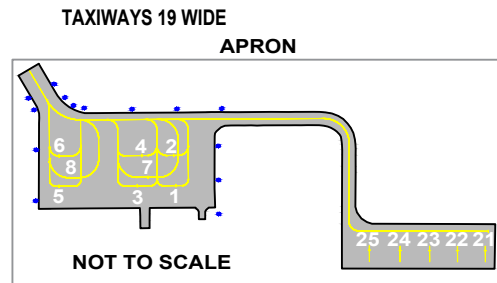


INS COORDINATES FOR  
AIRCRAFT STANDS

1	31°26'13.50"S	057°58'49.79"W
2	31°26'13.05"S	057°58'50.52"W
3	31°26'14.26"S	057°58'50.51"W
4	31°26'13.68"S	057°58'51.12"W
5	31°26'15.81"S	057°58'51.97"W
6	31°26'15.32"S	057°58'52.67"W
7	31°26'13.91"S	057°58'50.50"W
8	31°26'15.48"S	057°58'51.99"W
21	31°26'08.45"S	057°58'42.47"W
22	31°26'09.00"S	057°58'43.00"W
23	31°26'09.54"S	057°58'43.52"W
24	31°26'10.13"S	057°58'44.08"W
25	31°26'10.73"S	057°58'44.66"W

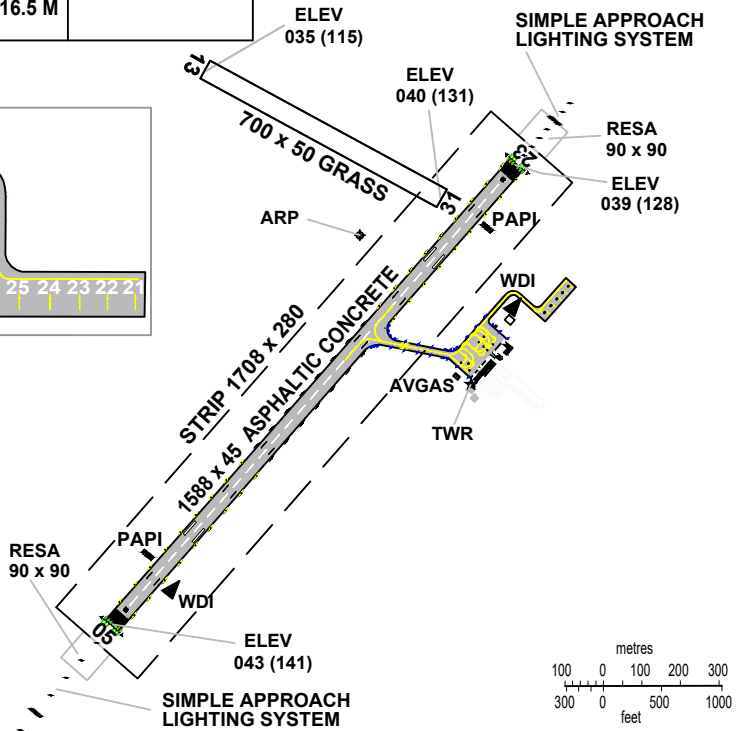


Change:  
RWY 13/31, COORD THR 13, Strength

MARKING AIDS RWY 05/23 AND EXIT TWY

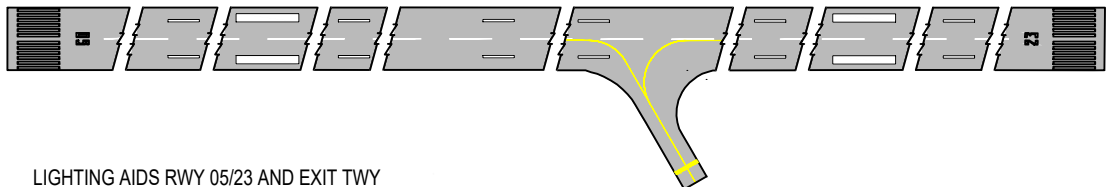

LIGHTING AIDS RWY 05/23 AND EXIT TWY

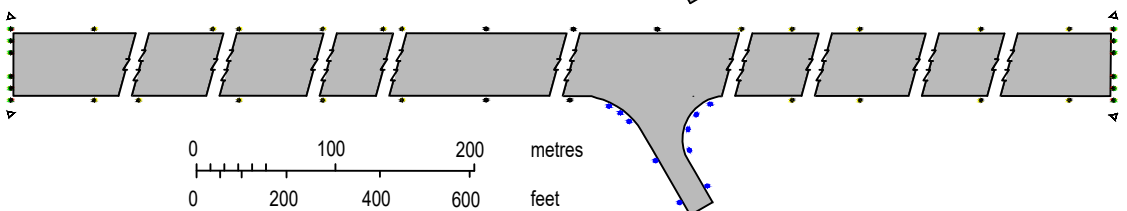

**INTENTIONALLY  
LEFT BLANK**



# AERODROME OBSTACLE CHART - ICAO

## TYPE A (OPERATING LIMITATIONS)

DIMENSIONS AND ELEVATIONS IN METRES



SALTO / Intl Nueva Hespérides

MAGNETIC VARIATION 11° W JAN 2020


### RWY 05 / 23

#### DECLARED DISTANCES


RWY 05		RWY 23	
1588	TAKE-OFF RUN AVAILABLE	1588	
1588	TAKE-OFF DISTANCE AVAILABLE	1588	
1588	ACCELERATE STOP DISTANCE AVAILABLE	1588	
1588	LANDING DISTANCE AVAILABLE	1588	

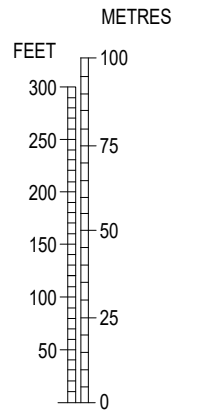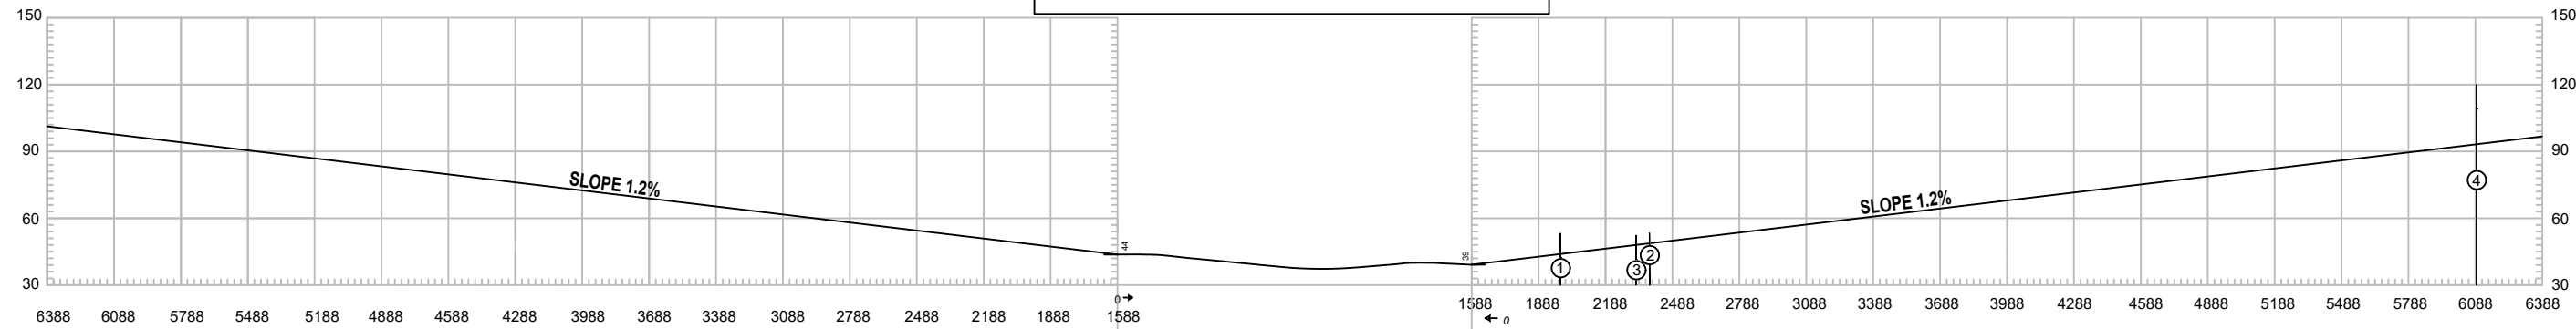

VERTICAL SCALE  
1 : 2 000

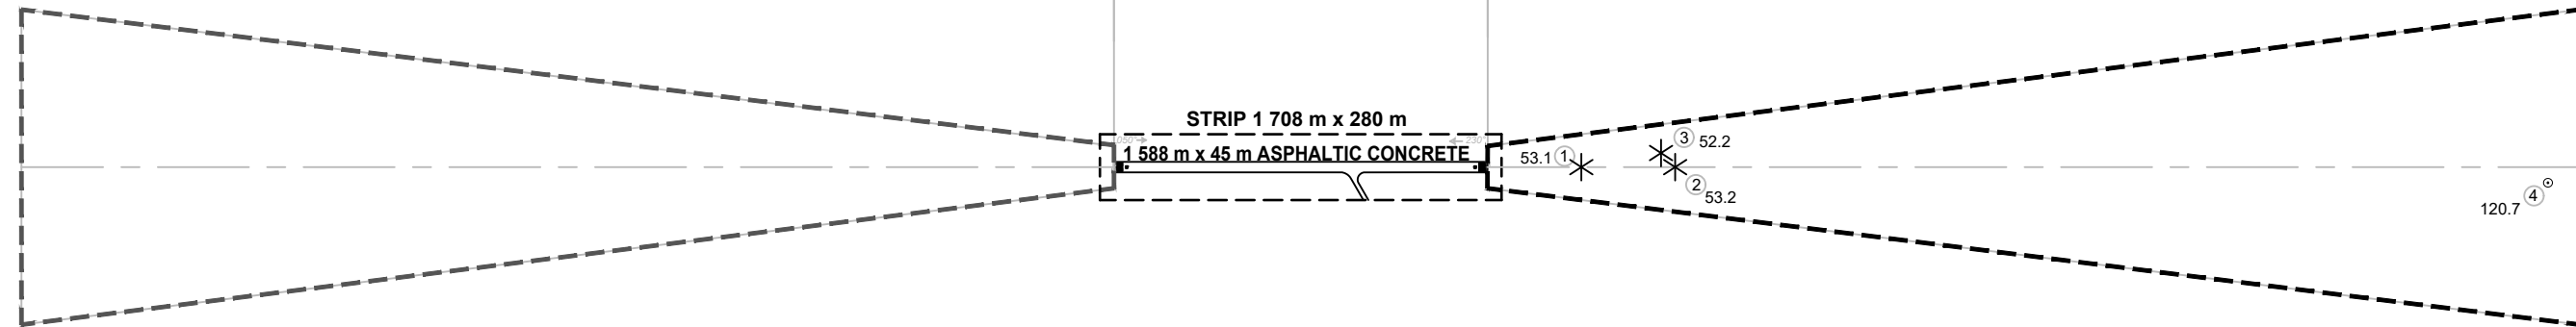

LEGEND	
IDENTIFICATION NUMBER	①
TREE OR SHRUB	*
HIGHWAY	====
POLE, TOWER, SPIRE, ANTENNA, ETC.	⊙
BUILDING OR LARGE STRUCTURE	■
RAILROAD	—+—+—+—
TERRAIN CONTOUR	~
TERRAIN PENETRATING OBSTACLE PLANE	▲

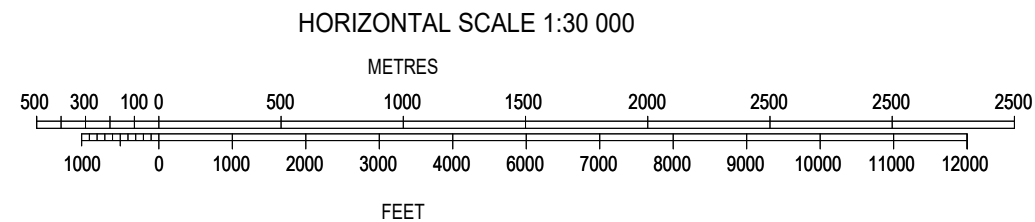

ORDER OF ACCURACY  
HORIZONTAL 01 M  
VERTICAL 01 M

Change:  
New chart

**INTENTIONALLY  
LEFT BLANK**



**INTENTIONALLY  
LEFT BLANK**